

LOCAL AIR CONDITIONERS

AMC-11AN AMC-14AN

- Auto-protection function
- Independent dehumidifying function
- Microprocessor control
- Rotary compressor
- Exchangeable filter
- 24-hour timer
- Environmentally friendly
- 2-year warranty



OPTIONAL ACCESSORIES

AMC-WINK
WINDOW KIT




AMC-WK
WALL KIT



AK-15A
WALL CONTROLLER SET



TECHNICAL PARAMETERS

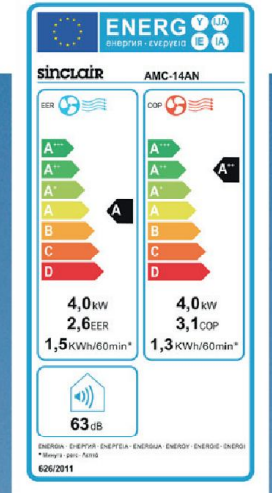

| MODEL | | | AMC-11AN | AMC-14AN |
|-------------------------------|----------------------------------|-------|---------------------|---------------------|
| Capacity | Cooling | kW | 3,0 | 4,0 |
| | Heating | kW | 3,0 | 4,0 |
| Optimal room size | m ² | | 15-25 | 25-35 |
| Frekvence/Napéti | Hz / V | | 1 ~ / 50 / 220-240 | 1 ~ / 50 / 220-240 |
| Rated current | Cooling/Heating | A | 5,8 | 7,7 |
| Power input | Cooling/Heating | W | 1200 / 1000 | 1500 / 1300 |
| | EER / COP | | 2,6 / 3,1 | 2,6 / 3,1 |
| Energy class | Cooling/Heating | | A / A++ | A / A++ |
| Noise - indoor unit | Min/Max | dB(A) | 62 | 63 |
| Air flow | m ³ /h | | 400 | 450 |
| Dehumidifying volume | l/h | | 50 | 70 |
| Refrigerant type/ charge | Type / kg / t eq.CO ₂ | | R410A / 0,55 / 1,15 | R410A / 0,61 / 1,27 |
| Global Warming Potential | GWP value | | 2088 | 2088 |
| Dimension (w x h x d) | mm | | 300x778x505 | 300x778x505 |
| Package dimension (w x h x d) | mm | | 330x815x550 | 330x815x550 |
| Net weight | kg | | 28,5 / 30,7 | 30,6 / 32,8 |
| Operating temperature | Cooling | °C | 17 ~ 32 | 17 ~ 32 |
| | Heating | °C | 7 ~ 25 | 7 ~ 25 |

R410A (50% HFC-32, 50% HFC-125), GWP 2088
 Contains fluorinated greenhouse gases covered by the Kyoto Protocol.
 Hermetically sealed system.

